


INSTALLATION AND MAINTENANCE

OF ALUTREND COMPACT FLOORMATS

Installation:

The walking direction of the mat is perpendicular to the aluminum rails. When designing the die, this must be considered. The Compact type can be safely installed in a 10 mm deep dies with L-shaped profiles. The expansion joint between the mat and the covering should not exceed 3 mm per side. The mat can only be installed horizontally, on a completely flat surface. The die must be clean, free of gravel and sand, before inserting each mat.

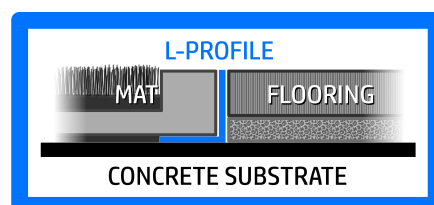

Maintenance:


The floor mat can be cleaned regularly with a normal vacuum cleaner with rotating brush. In case of major maintenance operations, cleaning with a warm water jet is also possible. After cleaning the die, it can be inserted again.



Handling and storage:

The mat should be carefully relocated in any case, for that two people are needed. The rolled floor mat may only be relocated by personnel, forklift trucks are highly unsuitable!

The rolled mat should be stored standing on the wall. While handling and storing, it is forbidden to place the mats on each other, or other weights on the mats! It should be stepped on the mat only when folded out.



Tips for cleaning the die:

In case of large floor mats, it is only necessary to roll up the mats one by one during the cleaning of the die, and to sweep or soak out the dirt.

